

IP06 OSD

On Screen Display

Benefits of Upgrading:

- Improved picture quality
- Improved overlaid text quality
- Multiple Fonts/text backgrounds
- 12 page memory
- Real time clock/date display
- Distancecounter Display
- Can be controlled via WinCan Mobile with all the usual controls and features.


IP06 Specifications:

- Composite Video Input 1V P-P (NTSC/PAL)
- Single two phase quadrature encoder input driven through one of three buffers.
Optp isolator at 220Ω, high impedanse buffer or open collector source.
- Display output metric/imperial
- Single 12bit analogue to digital converter
- Two bi-directional RS232 ports (one used for WinCan Comms)
- Standard PS2 keyboard compatible
- Battery Backup (Ram)

There are three configurations available:

Board Only:

Allowing integration in an existing CCTV system.

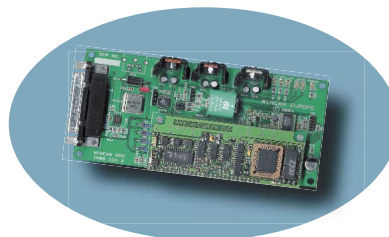

Plug and Play:

Standalone unit with BNC connections for video input, 9 and 15 way "D" Type connections for WinCan, counter, A/D and a 12V power connector.


For Telespec customers this unit connects directly to the Compact 152 to replace the existing ANGI without any need for wiring or external power. Its just Plug and Play.



19" Rack:

Standard 19" Rack 1U in Height with BNC connections for video input, 9 and 15 way "D" Type connections for WinCan, counter, A/D and a 90-250V AC power supply.

For Telespec customers this unit connects directly to the Mainline unit as a direct replacement for the existing ANGI.

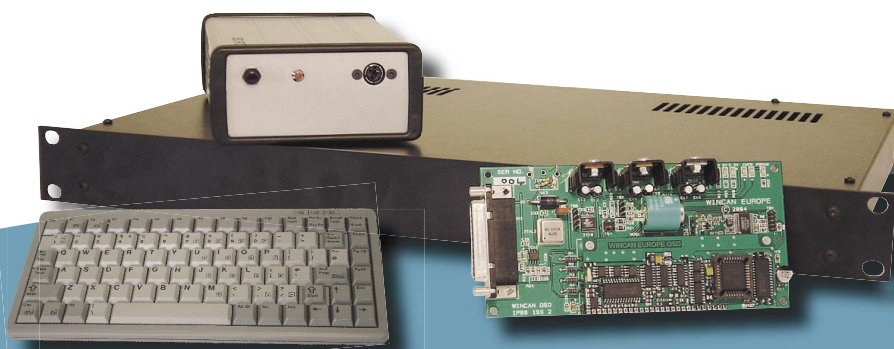

ReSearched Solutions
info@drainworld.com
T - 01246 591595
F - 0870 300 4300

WinCan Europe Ltd
13 Cherry Street, Woking, Surrey GU21 6EE
Tel. +44 (0)1483 762222
Fax. +44 (0)1483 762226
info@wincaneurope.com www.wincaneurope.com